

H.265 4HDD 32ch NVR

IV-ANVR3204



KEY FEATURES

HD Input

- ▶ S+265/H.265/H.264 video formats
- ▶ Connectable to the third-party network cameras
- ▶ Support live view, storage, and playback of the connected camera at up to 8MP resolution

HD Output

- ▶ 1×HDMI and 1×VGA simultaneous outputs
- ▶ HDMI Video output at up to 4K resolution

HD Storage

- ▶ 4 SATA interface, up to 10TB for 1 HDD
- ▶ S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- ▶ 2×RJ45 self-adaptive 10/100/1000 Mbps network interface

Various Applications

- ▶ Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- ▶ Connectable to smart IP cameras from IRIVISION and the recording, playing back, and backing up of VCA alarms can be realized
- ▶ VCA detection alarm is supported
- ▶ Web6 supports plug-in free browsing and can preview videos on all browsers
- ▶ Support cloud upgrade

H.265 4HDD 32ch NVR




SPECIFICATIONS

| Input | |
|---------------------------|---|
| Video Input | 32-ch |
| Max Resolution | 8MP |
| Two-way Audio Input | 1-ch, 3.5mm |
| Bandwidth | Income 160Mbps; Outgoing 48Mbps |
| Output | |
| HDMI/VGA Output | HDMI 1-ch, 3840x2160, 1920x1080, 1280x720, 1024x768, 1366x768, 1440x900, 1280x800 VGA 1-ch, 1920x1080, 1280x720, 1024x768, 1366x768, 1440x900, 1280x800 |
| Screen Split | 1/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32 |
| Audio Output | 1 x RCA |
| Decoding | |
| Decoding Format | S+265/H.265/H.264 |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Preview Capability | 2x8MP, 2x6MP, 3x5MP, 4x4MP, 5x3MP, 8x1080P, 16x720P, 32x4CIF |
| Synchronous Playback | 2x8MP, 2x6MP, 3x5MP, 4x4MP, 5x3MP, 8x1080P |
| Records Encryption | Yes |
| Hard Disk | |
| SATA | 4 SATA interface for 4 HDDs |
| Capacity | Up to 10TB for each HDD |
| eSATA Interface | N/A |
| Array Type | N/A |
| External Interface | |
| Network Interface | 2xRJ45 self-adaptive 10/100/1000 Mbps network interface |
| USB Interface | 1xUSB 2.0, 1xUSB 3.0 |
| Serial Interface | N/A |
| Alarm In/Out | N/A |
| Network | |
| Protocol | HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, DHCP, DNS, DDNS, EasyDDNS, NTP, SMTP, SSL, QoS, IPv4, IPv6, IP Filter, Telnet, SSH, RTSP, RTP, RTCP, ARP, SNMP(v1), PPPOE |
| System Compatibility | ONVIF (PROFILE S/T/G), SDK, P2P |
| General | |
| Web Version | Web6 |
| Language | Simplified Chinese/English/Spanish/Italian/Korean/Turkish/Russian/ Thai/French/Hebrew/Polish/Dutch/Arabic/Vietnamese/German/Ukrainian |
| Operating Conditions | -10~55°C, 10%~90% RH |
| Power Supply | DC12V 5A |
| Consumption (without HDD) | ≤25W |
| Chassis | 1.5U |
| Dimensions | 75x347x440mm, (2.95x13.66x17.32 inch) |
| Weight (without HDD) | 3.35Kg (7.38lb) |

H.265 4HDD 32ch NVR



DIMENSIONS (Unit: mm)

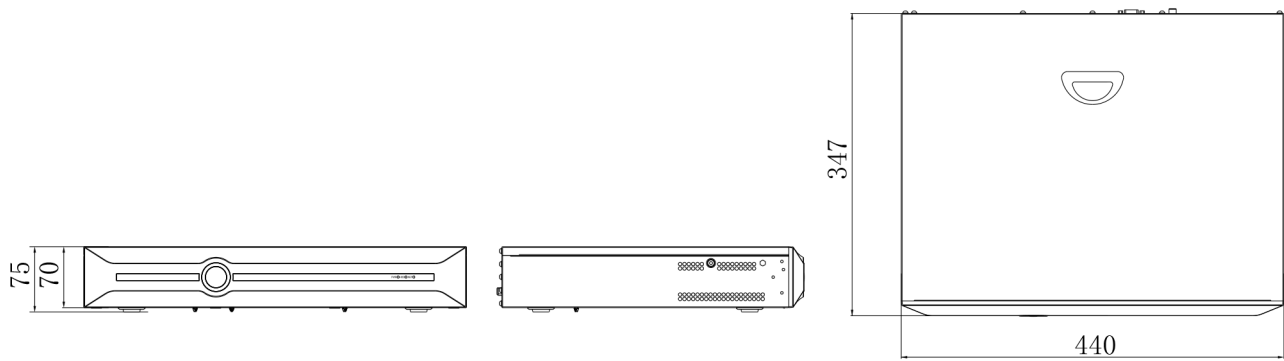

Physical Interfaces

